


Installing Vision Blinds, Inside or Outside Fit.

1


Preparation – With your pre-installation stretches done you'll need the following items: a screwdriver (or power drill with the appropriate bit), the screws provided, and potentially a step ladder, pencil, & measuring tape. Carefully unwrap your vision blinds, and brackets, then move to step 2.

2

Fitting the brackets – There are two types of bracket depending on whether your vision blinds were measured as inside mount or outside mount. Use the 'top fix' bracket for inside mounted vision blinds, and the 'face fix' bracket for outside mounted vision blinds.

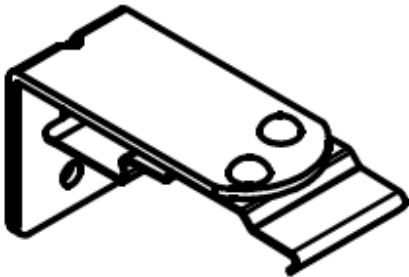


Face fix bracket

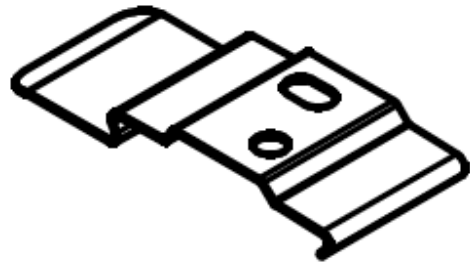

Top fix bracket



Picture where the blind will sit. Within the reveal for inside mounted vision blinds. On, or above, the architrave for outside mounted vision blinds (depending on how you measured for them). Positioning will depend on what handles or latches the vision blind needs to miss when it goes up and down. Mark your bracket positions at a desired depth within the reveal for inside mounted vision blinds. Or mark the bracket positions on or above the architrave for outside mounted vision blinds.

For a vision blind up to 1m wide attach 2 brackets approximately 75mm from each end of the blind. For vision blinds wider than 1m, intermediate brackets should be spaced evenly as per the following guidelines: Up to 1m wide use 2 brackets. 1–2m use 3 brackets. And 2–3m use 4 brackets to secure your vision blinds. If you have multiple blinds it's best to divvy the brackets out at the beginning so you don't run short at the end. You will be provided with enough brackets.

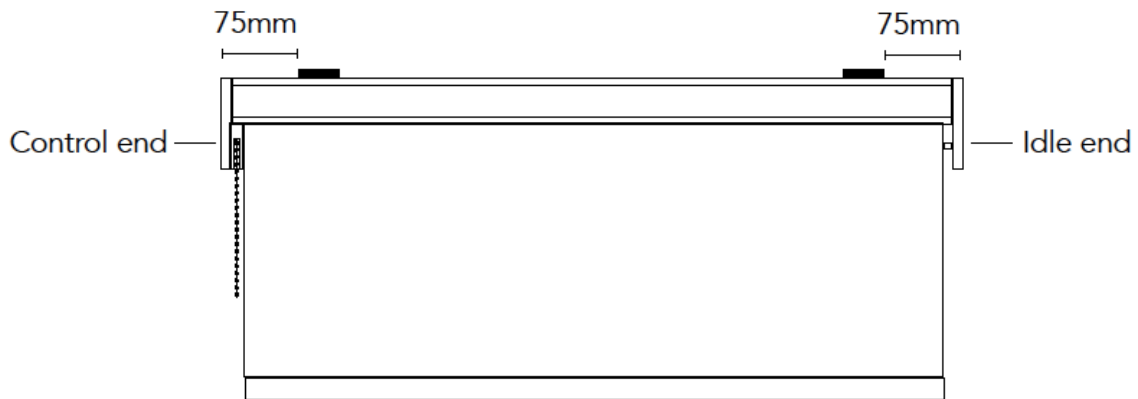

TIP 1: For inside mounted vision blinds use 1 screw per bracket (provided screws are suitable). For outside mounted vision blinds use 2 screws per bracket (the screws provided are suitable for fixing into solid timber. If outside mounting to the wall you will need to supply your own fixings as there is no one screw suitable for all wall materials and situations.

TIP 2: Ensure the bracket 'release lip' is at the back of the vision blind.

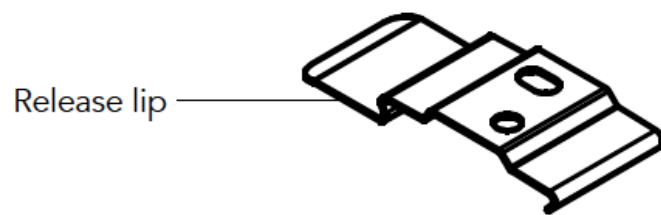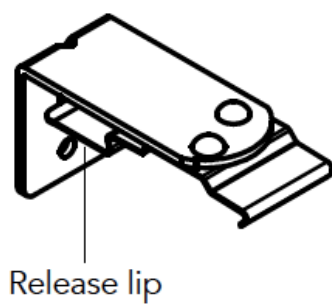

3

Fitting the vision blind – Nice work, now it's time to fit the vision blind to the secured brackets. Offer the vision blind up to the brackets with the cassette tilted away from you. Locate the front lip of the vision blind cassette into the front of the bracket, then push the cassette upwards into the back lip of the bracket. You should hear and feel the vision blind click into place. Ensure all brackets have securely grabbed hold of your vision blind.

4

Operating the blind – It is most important not to drag the control chain across the edge of the delicate vision blind fabric. Operate the blind with smooth steady pressure, not fast jerky movements. Please enjoy your new vision blinds.