

Installing Wooden & PVC Venetians Inside the Reveal

1

Prepare to install – Tools which will be helpful are: Screwdriver or power drill with appropriate screwdriver bit, screws (2 per bracket), ladder, pencil (optional), and tape measure (optional).

Carefully unpack your blinds and leave them pulled up for ease of installation




2

Fitting the brackets – Each blind has 2 box brackets, one for each end, and a centre support bracket if the blind is approx. 1.7m and over. Brackets are marked LH or RH. Screw the box brackets into the top inside corner of the window frames. Set back about 10mm so that the fascia will sit flush with the window frame when fitted (or recess further if desired)

Depending on the location of the brackets there are holes to screw through on the top, back and side of the brackets. and the hinged gate opens upward

Centre support brackets – for blinds 1.7m and over you will have been provided with centre brackets. Fit these in the window frame so the back of the bracket lines up with the back of the box brackets. Also place in or near the middle of the blind depending on the location of the cords and ladders (check this by looking at the corresponding blind before screwing)

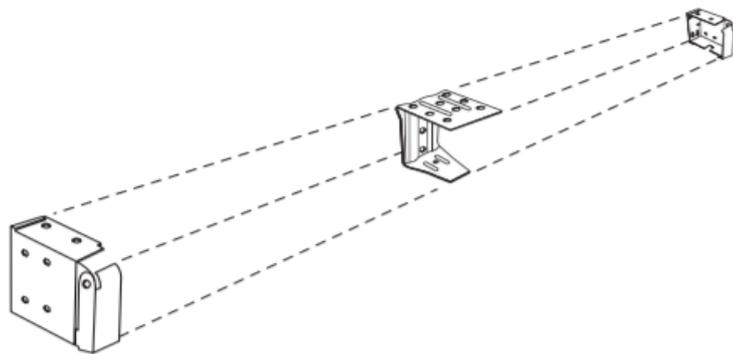

3

Fitting your blind – Ensure the box bracket gates are fully open. Hold the blind headrail with the control cords to the front (facing you). Align with the box brackets and slide the blind in fully so the hinge gates can be locked shut with a click. Ensure the small tab is secured inside the slot

Note: if you have PVC Homebrand PLUS Venetians with the plastic fascia clips you will need to clip these on before sliding the headrail into the brackets (leave the fascia off still)



4

Fitting the fascia – Wooden fascia's and PVC fascia's are secured in slightly different ways

Wooden fascia: remove the backing tape from the industrial velcro, which is fitted to the back of the fascia. Position the fascia at the headrail correctly and press firmly into place

PVC fascia: either slide the metal fascia hangers into the groove on the back of the fascia (Homebrand) and hang on the headrail or (if Homebrand PLUS) hang the plastic fascia clips on the headrail before sliding the blind into the brackets. Push the fascia firmly into place. Both systems have a piece of velcro to hold the fascia's from sliding sideways

